


TOUCAN



COMPACT DETASSELING MACHINE



4 OR 6 ROWS



HYDRAULIC VARIABLE
TRACK

Designed for farms looking for a simple, robust and economical solution, the TOUCAN model combines manoeuvrability and essential performance.

Its more imposing design and variable hydraulic track enable it to adapt perfectly to agricultural work, while guaranteeing unfailing reliability.



STANDARD EQUIPMENT

Find our videos



ENGINE	Pre-fitting for the knives-pneumatics selector directly from the cab
75 hp Perkins engine, 3,4 liters, no Ad-Blue ®	Hydraulic flow control of the cutting elements directly from the cab
Stage V certification	Front driving station
TRANSMISSION	Cab access ladder with hydraulic folding
Poclain ® hydrostatic transmission, anti-skid system	Multipurpose display
Differential lock	TYRES
4-wheel drive	Tyres: front and rear 270/95 R32
HYDRAULIC CIRCUIT	MISCELLANEOUS
Hydraulic oil cooler	Safety archtop
OPERATOR CAB	Lighting and light-signalling devices complying with the Highway Code
Homologated class IV, pressurized and air-conditioned cab, mounted on silent blocks	LED work lights (4 in front, 4 in back)
Adjustable steering column	Toolbox
Power steering	Backward movement alarm
Electrically adjustable and heated rear-view mirrors	120 liters fuel tank
Manual parking brake	Hydraulic variable track, position of the cutting elements based on the track
Bluetooth car radio	Rear-view camera
Double acting hydraulic suspension	



PERFECT

Equipped with a hydraulic variable track width, this machine combines versatility and cost-efficiency to adapt to all working conditions. Ideally suited for mid-sized farms, it is the perfect choice for agricultural contractors seeking high-performance, modular equipment to integrate into a diverse fleet.



...	OPTIONS
-----	----------------

Options	
TO-OP-01	Confort-class pneumatic seat
TO-OP-02	Wide tyres: front and rear 320/85 R32
TO-OP-03	Hitching for hosewheel irrigation machine gun
TO-OP-04	Hydraulic rear hitching (for chopper rolls male row destroyer or spraying equipment)
	Detasseling equipment
TO-OP-05	4 rows detasseling arm (2+2)
TO-OP-06	6 rows detasseling arm (3+3) with hydraulic folding of the arms
TO-OP-07	6 rows detasseling arm (2+2+2) with hydraulic folding of the arms
TO-OP-08	Automatic adjustable height with electronic control (2+2 or 3+3)
TO-OP-09	Automatic adjustable height with electronic control (2+2+2)
TO-OP-10	4 independant rows detasseling arm with row by row automatic adjustable height , hydraulic folding of the arms
TO-OP-11	6 independant rows detasseling arms with row by row automatic adjustable height , hydraulic folding of the arms
TO-OP-12	Knives cutting element (price for each row)
TO-OP-13	Pneumatics cutting element (price for each row)
TO-OP-14	Knives + pneumatics cutting element (price for each row)
TO-OP-15	Hydraulic folding of the arms (option for 4 rows 2+2)

...

OPTIONS

Find our videos



Knives male row destroyer equipped with protective casing									Chopper rolls male row destroyer	
TO-OP-16	TO-OP-17	TO-OP-18	TO-OP-19	TO-OP-20	TO-OP-21	TO-OP-22	TO-OP-23	TO-OP-24	TO-OP-25	TO-OP-26
35 cm	40 cm	50 cm	60 cm	70 cm	80 cm	90 cm	100 cm	110 cm	70 cm	100 cm

Options	Spraying equipments	Included
TO-OP-28	12m steel spraying bar, 5 sections, 3-jets nozzles	Including hydraulic slope compensation device, 2 in-between wheels 750 liters HDPE tanks, rinsing tank, washhand device, product induction bowl, distribution and pumping unit, filtration
TO-OP-29	15m steel spraying bar, 5 sections, 3-jets nozzles	
TO-OP-30	16m aluminium spraying bar, 5 sections, 4-jets nozzles	
TO-OP-31	18m aluminium spraying bar, 7 sections, 4-jets nozzles	
TO-OP-32	21m aluminium spraying bar, 7 sections, 4-jets nozzles	
TO-OP-33	24m aluminium spraying bar, 7 sections, 4-jets nozzles	
TO-OP-34	Front spraying bar for dribble bars (only for machines with a spraying equipment)	
TO-OP-35	Dribble bar (price per unit)	
	DPAE	
TO-OP-36	DPAE Bravo 180 S regulation device	
TO-OP-37	DPAE Bravo 350 regulation device	
TO-OP-38	DPAE Bravo 400 S regulation device (sections shut-off via a GPS signal - GPS antenna included)	
TO-OP-39	All the spraying bars are equipped with a kit of standard nozzles + a kit of air injection nozzles (color to be determined when placing the order)*	

***ADDITIONNAL KIT OF NOZZLES UPON REQUEST**





TECHNICAL FOCUS

Find our videos



Width A	Mid-leg B		Track width C		Width D		Clearence E	Height F	Wheelbase G	Lenght H	Overall width I	Weight
	Tyres 270/95R32	Tyres 320/85R32	Tyres 270/95R32	Tyres 320/85R32	Tyres 270/95R32	Tyres 320/85R32						
1170 à 1970	1570 à 2370	1630 à 2430	1700 à 2500	1760 à 2560	2070 à 2870	2140 à 2940	1600	3570	2830	4160	2550 à 3350	4700 Kg

*All dimensions in mm

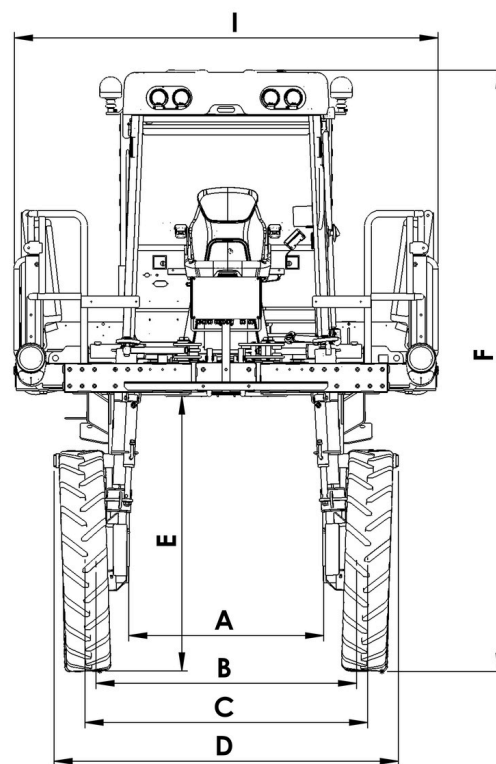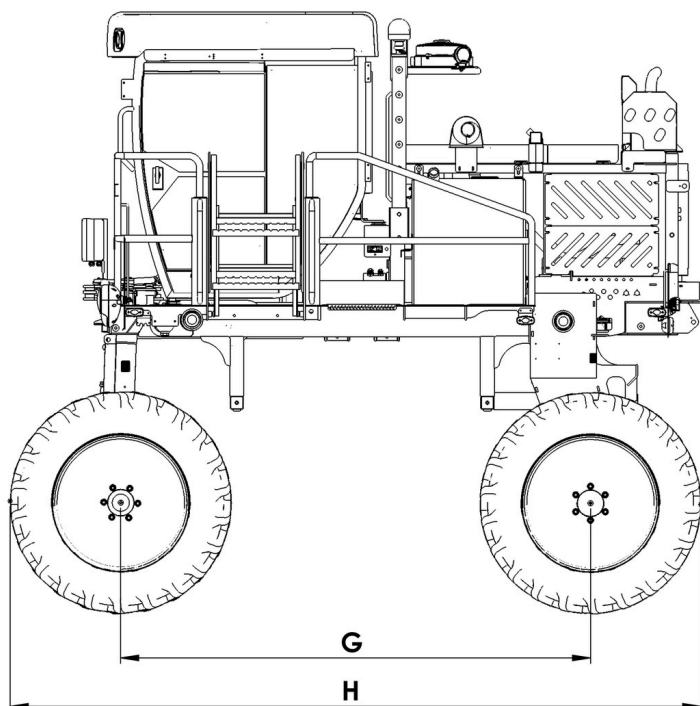

Find all our products
on our website

FREMA.FR

The technical specifications presented in this catalog are subject to change without prior notice.